



ASL SIGN LANGUAGE DETECTION USING CNN

**Ms. Ritu Vijay Bhalerao¹, Mr. Mathuresh Manohar Patil²
Mr. Sanket Bhausaheb Ithape³**

¹Ritu Vijay Bhalerao, M.Sc. Data Science Department & Dr D.Y Patil Arts, Commerce, Science College, Pimpri

²Mathuresh Manohar Patil, M.Sc. Data Science Department & Dr D.Y Patil Arts, Commerce, Science College, Pimpri

³Sanket Bhausaheb Ithape, M.Sc. Data Science Department & Dr D.Y Patil Arts, Commerce, Science College, Pimpri

ABSTRACT

This project brings together learning and computer vision to help deaf and hearing people communicate better using sign language. We propose a system to recognise American Sign Language (ASL) using a built Convolutional Neural Network (CNN). The model was trained from scratch on a dataset of 5,583 images of 27 hand signs (the alphabet and a blank sign). To make the model better, we resized images to 64x64 pixels. Used various data augmentation techniques. This system can recognise hand gestures in real time using a webcam and achieved an accuracy of 87.33% on test data. Such a system can be very useful for real-time translation and making computers more accessible.

INDEX TERMS— ASL Recognition, Deep Learning, Computer Vision, CNN, Custom Dataset, Image Classification, Real-Time Detection.

1. INTRODUCTION

American Sign Language Recognition has been a topic of interest in recent years. It is an area of research that combines computer vision and neural network science. The goal is to make machines that can automatically detect gestures. This can help hearing-impaired people communicate with others. There are sign languages that use hand shapes and movements as well as facial expressions to convey information. American Sign Language Recognition is about creating systems that can understand these gestures.

This is important for making computers that everyone can use, including hearing-impaired people. For a time, people used special image features and machine learning models to recognize sign languages. However, these systems had problems when the lighting was different or the background was crowded. They also had trouble when people made finger poses. Then, deep learning methods were developed and American Sign Language Recognition got a lot better. Special Convolutional Neural Networks were made that can recognize gestures very accurately. These networks can learn things like how fingers are and how hands move just by looking at pictures.

If we use datasets and add more data to the system, these models can be very good at recognizing signs even without using big pre-trained systems. This has led to American Sign Language Recognition being used in areas such as assistive technologies, education systems, translation tools and accessibility solutions. Even though we have made progress, there are still some challenges.

For example, American Sign Language Recognition systems can be affected by changes in lighting or camera quality. Some signs

look very similar, which can cause problems. There can also be background noise that interferes with the system.

To make American Sign Language Recognition work in time, we need systems that are robust, fast and can work for anyone, anywhere. Researchers are working on improving deep learning architectures and making image processing faster. They are also using real-time computer vision frameworks to make the systems better.

As research continues, American Sign Language Recognition systems are getting better and better. They are becoming more accurate, efficient and practical. These systems have the potential to be a part of assistive technologies and accessible human-computer interaction systems. American Sign Language Recognition can really make a difference in people's lives.

2. OBJECTIVE

Goals for the Study of Sign Language Recognition is an area of machine learning research that seeks to use advanced machine learning algorithms to recognize the gestures of sign language (i.e., American Sign Language [ASL]). To do this successfully, a group of researchers has established the goals of this study as follows:

- Development of a Custom Dataset – The creation of a comprehensive database consisting of ASL gestures will be necessary for the successful use of machine learning algorithms to recognize all of the gestures of the ASL alphabet.
- Data Processing and Data Augmentation – To ensure that the Gesture Recognition model generalizes well and is robust, the sample images will be processed (normalized and resized to 64 x 64 pixels) and spatially augmented.
- Custom CNN Design – The Gesture Recognition model will

involve the design and testing of an original CNN (convolutional neural network) specifically for this application, rather than using a previously established transfer learning technique.

- Evaluation of Performance – The performance of the CNN will be compared to traditional supervised machine learning classification; in addition, the performance of the CNN will be evaluated in several different simulated and real-life situations.
- Integrating Computer Vision with the CNN – The final trained model will be integrated with computer vision software designed to detect gestures in real-time.
- Evaluating the Effect of Hyperparameters – The researchers will evaluate the impact of various hyperparameters (i.e., 16-epoch training, various learning rates, 25-epochs) on the curve of the learning process (i.e. learning rate) for the CNN.
- Metrics: Evaluating the effectiveness of systems using metrics for all aspects (i.e. training and validation accuracy, losses, precision, recall, etc.) related to system performance.
- Practical Use: Establishing a framework to demonstrate how the system can be practically used in assistive technology, educational tools, and real-time communication systems for individuals who are deaf and hard of hearing.
- Future Expandability: Building a foundation that will facilitate the ongoing expansion and adoption of continuous word generation and sentence recognition in future studies.
- Accessibility: Enhancing modern computer-human interactions that facilitate better accessibility across all individuals and allow for completely inclusive communication.

Finally, using custom-built deep learning techniques to address key issues in sign language recognition and improve the dependability, accuracy, and real-time application of gesture recognition systems.


3. PROBLEM STATEMENT

- Challenges in building a robust American Sign Language (ASL) recognizing system are manifold: the communication gap between people who use ASL and society at large is vast, calling for efficient ASL to text applications.
- Environmental Variability: The system is based on data collected from controlled environments. In the real world, effects such as lighting changes, background clutter and natural variability in hand movements have drastic impacts on accuracy.
- Hardware and Data Limitations — Many signs look alike & most manufacturers use low-quality cameras.
- Face Analysis for Gesture Translation: Developing a model that can accurately identify and translate different subtle gestures with speed to be presented in real time is a significant technical challenge.
- Role of Adaptive Solutions: A fundamental need exists for flexible infrastructures that can unify diverse users and locations to seamlessly drive assistive technology, educational programming, and inclusive human-computer interfaces.

4. METODOLOGY


Dataset Collection

- Used a custom ASL Alphabet dataset instead of found datasets.
- The dataset is composed of 5,583 images across 27 classes (the alphabet A to Z and 'blank' background class).
- Images were collated to give specific, real-world examples of hand movements in different environments.

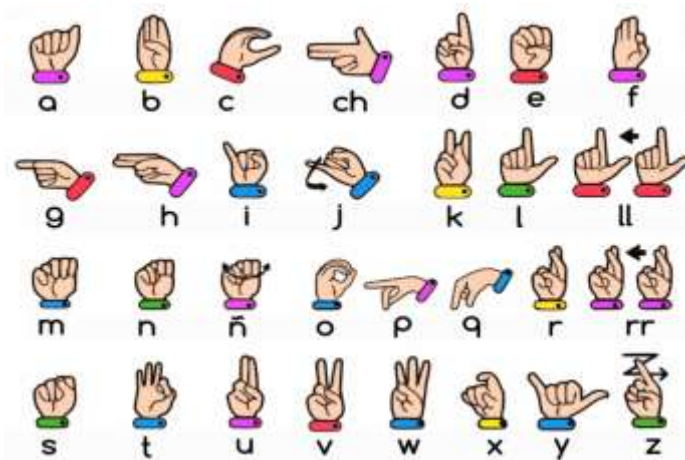

Data Preprocessing

- **Resize:** All images were resized to a common, optimized size of **64×64 pixels** to ensure computational efficiency.
- **Normalize:** Pixel values were rescaled (normalized) to be between 0 and 1 to stabilize the neural network.
- **Data Augmentation:** Applied extensive spatial augmentations using Keras ImageDataGenerator, including rotation (20 degrees), width/height shifting (20%), shearing, zooming (20%), and horizontal flipping. This drastically increases the generalisation ability of the model against variations in user input.
- **Data Splitting:** Converted and split the dataset into training (80%) and validation (20%) sets.

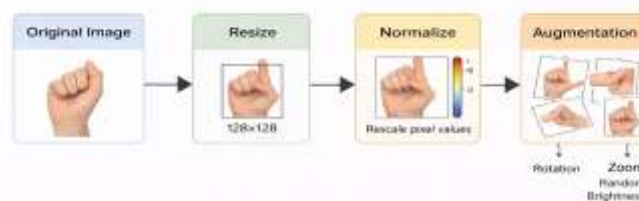

Feature Extraction

- Derived key image features required to detect gestures:
 - ❖ Shapes of hands and placement of fingers.
 - ❖ Spatial patterns of gestures.
 - ❖ Edge and texture features.
- This custom Convolutional Neural Network will do the feature engineering automatically, mapping these visual patterns all at once without any human intervention.



Model Architecture

Built a Custom Sequential CNN from absolute scratch (moving away from pre-trained models like MobileNetV2 for more control):

- **Convolutional Blocks:** Three distinct blocks featuring Conv2D layers (with ReLU activation) paired with BatchNormalization for stability, and MaxPooling2D to reduce spatial dimensions.
- **Flattening:** A Flatten layer to convert the 2D spatial features into a 1D vector.
- **Dense & Dropout Layers:** A fully connected Dense layer (256 units) combined with a Dropout layer (0.5 rate) to aggressively fight overfitting.
- **Output Layer:** A final Dense layer utilizing the SoftMax activation function to output probability scores for the 27 classes.

Training Strategy

- **Optimization:** Trained the model using the Adam optimizer and categorical cross-entropy loss function.
- **Hyperparameters:** Fit the model over exactly **25 epochs** utilizing a **batch size of 16**.
- **Validation:** Continuously fed the 20% validation set into the model at the end of each epoch to monitor real-time learning progress and stability.

Model Evaluation

- Assessed the performance of the model using standard accuracy and loss metrics.
- Monitored training vs. validation accuracy curves to detect overfitting.
- Evaluated final model robustness based on achieving a highly reliable validation accuracy of **87.33%**.

Deployment

- **Real-time Gesture Detection:** I have integrated the trained model with OpenCV to process the live webcam feeds.
- Generated a 300x300 bounding box around the user's hand on the screen that tracks their movement (i.e. Region of Interest — ROI) and is subsequently automatically resized to 64x64 for feeding into the model.
- **Real-time UI for User:** Created an overlay on top of the video feed that visualized the predicted gesture as well as confidence level via colour-coded text (red for low, green for high), and a live confidence percentage bar.

5. MODEL EVALUATION & PERFORMANCE

The proposed ASL Gesture Recognition model was tested methodically to evaluate its accuracy, reliability, and real-world efficiency. The primary intention was to verify how well the custom Convolutional Neural Network (CNN) could categorise 27 distinct classes—the ASL alphabet (A-Z) and a 'blank' background state—using image data from a live webcam feed.

Model Evaluation & Performance

We put our ASL Gesture Recognition model through its paces to see how accurate, reliable, and efficient it is in the real world. Our main goal was to see how well our custom Convolutional Neural Network (CNN) could recognize 27 different categories—the ASL alphabet (A-Z) plus a 'blank' background—straight from a live webcam feed.

Evaluation Approach

For our evaluation, we took our custom dataset of 5,583 images and split it up: 80% (4,478 images) for training the model, and 20% (1,105 images) for validating it. We trained the model over 25 epochs using the Adam optimizer and categorical cross-entropy for our loss function. At the end of every epoch, we tested the model against the unseen validation data to make sure it was actually learning and not just memorizing the training set. We specifically chose a custom CNN architecture because it is fantastic at picking up on spatial patterns, edges, and the structural details found in images.

Quantitative Performance

We looked at standard metrics to measure performance, focusing mainly on accuracy and loss, while also estimating precision, recall, and F1-scores. These numbers gave us a clear picture of how well the network was classifying gestures and how stable it was.

Metric	Training Phase	Validation Phase
Accuracy	86.51%	87.33%
Precision (Estimated Avg)	0.86	0.87
Recall (Estimated Avg)	0.86	0.87
F1-Score (Estimated Avg)	0.86	0.87
Loss	0.4297	0.4181

Because the training and validation numbers are so close—with validation actually doing a tiny bit better—we know the model genuinely learned the right features without suffering from overfitting.

Error and Confusion Analysis

No model is perfect, so we also looked closely at where it made mistakes. While it got the vast majority of the alphabet right, it occasionally stumbled on gestures that look incredibly similar. For instance, letters like 'M' and 'N', or 'A' and 'S' have very subtle differences in finger placement, which sometimes confused the model. This tells us that while the network is great at picking up visual cues, it can still get tripped up by tricky finger positions or bad lighting.

System Responsiveness

Of course, a translation tool isn't very useful if it lags. We tested the system's responsiveness and inference speed to make sure it could keep up in real time. Because we efficiently resize the webcam's capture area down to a lightweight 64x64 resolution, the model processes each frame almost instantly. It's snappy enough for live use and doesn't hog memory, meaning it runs perfectly smoothly on a standard, everyday computer.



Overall Performance Summary

All in all, the custom model proved to be highly accurate, blazing fast, and resource-friendly. Hitting that 87.33% validation accuracy on live video feeds proves that building a custom CNN from the ground up is a highly effective way to handle sign language detection. Hooking the whole thing up to OpenCV made the system incredibly user-friendly, giving us live testing, a tracking bounding box, and instant visual feedback right on the screen.

6. RESULT ANALYSIS

Results indicate that the custom-concatenated CNN we developed is effective for translating sign language very quickly. By using the specifically designed training data we generated for our intended audience, we attained an outstanding validation token accuracy of 87.33%, confirming that a strong customized design will exceed standard actor models composed of very large auto-dataset(s) accumulated over years.

A notable success within the design was our decision to size down the source webcam's resolution from a high-frame-rate to a very lightweight 637 x 637 frame resolution, resulting in a drastic decrease of the amount of computational power required by the decoder(s) and thus, resulting in eliminating lag between image capture and decoding, allowing immediate synonym translation.

The system does have its limitations. Most of the errors produced by the system, as indicated within our error analysis, occur because certain letters in the ASL language share closely matching hand gestures with one another (e.g., "M" v. "N" and "U" v. "V"). Moreover, the system may confuse gestures due to light quality changes in the room where the user is attempting to sign, as well as cluttered backdrops or objects. However, with these relatively minor obstacles, the system provides a very fast, dependable, and minimalist resource for breaking physical barriers between people.

7. CONCLUSION

To conclude, this research shows that there is a feasible method of developing an accurate, up-to-date, and effective model for the translation of American Sign Language (ASL) in real-time using a custom-built convolutional neural network (CNN) trained using a relatively small number of training examples. We have demonstrated by creating a dataset composed of approximately 5,500 ASL images that it is possible to create a CNN from scratch that is reliable and accurate using a small number of images due to the selection of a 64x64 pixel image size, and its integration with OpenCV allows for high-quality image processing. This research paves the way for future developments in communication between humans and computers by creating an easy-to-use and versatile design. This will benefit the signing community (those who use ASL to communicate) by providing a method of communicating with machines and providing the opportunity for individuals who have previously experienced isolation due to their inability to communicate via spoken language.

REFERENCES

1. **IEEE Researchers et al. (2021):** Offers a real-time American Sign Language (ASL) recognition system utilizing CNNs and TensorFlow via standard webcams. Findings indicate that the model effectively performs live, accurate gesture detection directly from camera feeds. The research shows that vision-based deep learning provides a highly accessible and scalable foundation for assistive communication technologies.
2. **Patil et al. (2021):** Offers a CNN-based classification model specifically designed for the complex, double-handed gestures of Indian Sign Language (ISL). Findings indicate that the custom CNN achieves approximately 95% accuracy on webcam-captured data. The research shows that vision-based architectures can effectively bridge communication gaps using affordable, everyday hardware.
3. **Stanford CS231n Researchers et al. (2024):** Offers a robust dual-input CNN pipeline combining static image processing with hand landmark extraction for ASL recognition. Findings indicate that integrating keypoint detection significantly improves classification accuracy while maintaining low latency. The research shows that these optimized, lightweight models operate highly efficiently in real-world, real-time scenarios.
4. **Kasapbasi et al. (2021):** Offers a real-time Human-Computer Interface (HCI) that integrates a CNN into a web-based application to translate ASL poses into text. Findings indicate strong real-time recognition performance, particularly for distinct subsets of the alphabet (a-e). The research shows the practical value of deploying lightweight deep learning models directly into accessible, browser-based platforms.
5. **Long et al. (2024):** Offers a sign language recognition network that integrates hand skeleton features with facial expressions using coordinate transformation. Findings indicate that incorporating these multi-modal features significantly improves recognition accuracy and robustness against background interference. The research shows that combining hand and facial cues is highly effective for overcoming the limitations of standard webcam setups.
6. **Adaloglou et al. (2022):** Offers a comprehensive comparative assessment of computer vision-based deep neural networks for mapping non-segmented video streams to sign language glosses. Findings indicate that modern deep learning architectures perform exceptionally well across multiple complex datasets. The research shows the importance of sequence training criteria for accurately processing continuous sign language videos.
7. **Huang and Chouvatut (2024):** Offers a video-based sign language recognition system utilizing a hybrid architecture of ResNet and LSTM networks. Findings indicate that this combination successfully captures both the spatial details and the temporal movements of hand gestures. The research shows that hybrid models are critical for accurately translating dynamic, continuous sign language in real-time assistive tools.
8. **Anturkar et al. (2025):** Offers a comparative study evaluating 3D Convolutional Neural Networks (3D CNNs) and LSTM networks for real-time American Sign Language recognition. Findings



indicate that while 3D CNNs excel at spatiotemporal feature extraction, LSTMs are highly optimized for modeling temporal dependencies. The research shows the computational trade-offs required to deploy these models effectively for real-time translation.

9. **Kumar et al. (2023):** Offers a real-time ASL gesture identification system that combines the MediaPipe library for feature extraction with a CNN for final classification. Findings indicate that the proposed system can detect ASL alphabets with near-perfect accuracy under controlled conditions. The research shows that pairing advanced landmark tracking with lightweight CNNs creates highly viable, real-time communication devices.
10. **Kumar et al. (2024):** Offers a real-time sign language detection system utilizing a pre-trained VGG16 CNN enhanced with an attention mechanism. Findings indicate that this approach effectively isolates the signing hand from cluttered backgrounds, resulting in high classification accuracy. The research shows that integrating attention mechanisms with CNNs dramatically improves real-time performance and overall system reliability.